



SW 16

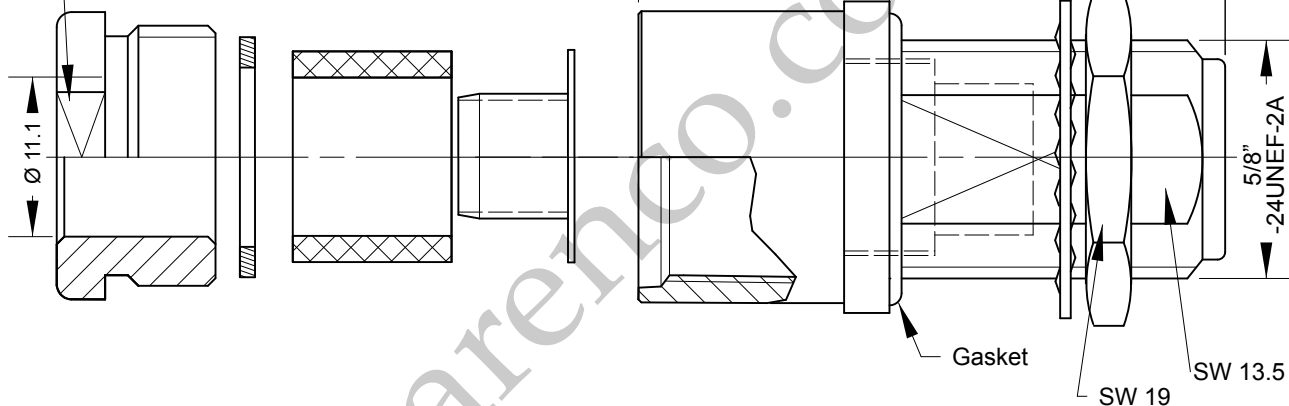


Cable : RG213, RG214 & Equivalents


Pin and insulator arrangement

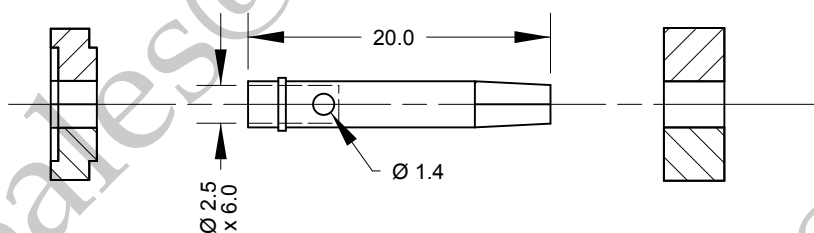

Cable Preparation

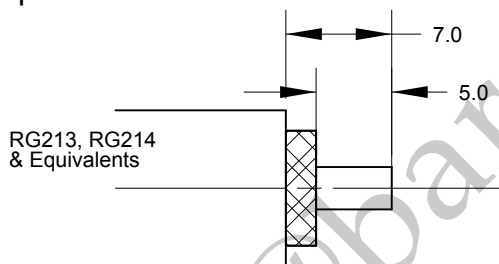

Recommended Panel Piercings Dimensions

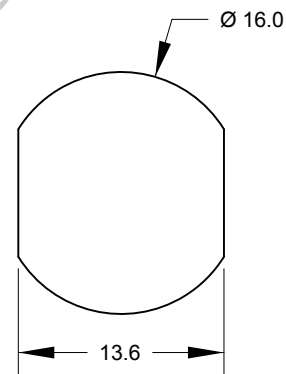

Cable Construction Specifications

	RG213	RG214
Inner Conductor	2.29mm	2.29mm
Dielectric	7.25mm	7.25mm
Outer Conductor	8.00mm	8.00mm
Overall Braid	8.00mm	8.60mm
Jacket	10.30mm	10.80mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Gasket	Silicone Rubber

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email: Sales@barenco.co.uk. Web: www.barenco.co.uk

BARENCO Ltd

DRAWN Name BPG

Dimensions: mm

Date 12/04/2021

Last Rev.

SCALE 1 : 0.5

N bulkhead socket
for RG213 & RG214

SIZE

A4

DWG NUMBER

165035

REV -

SHEET 1 OF 1