



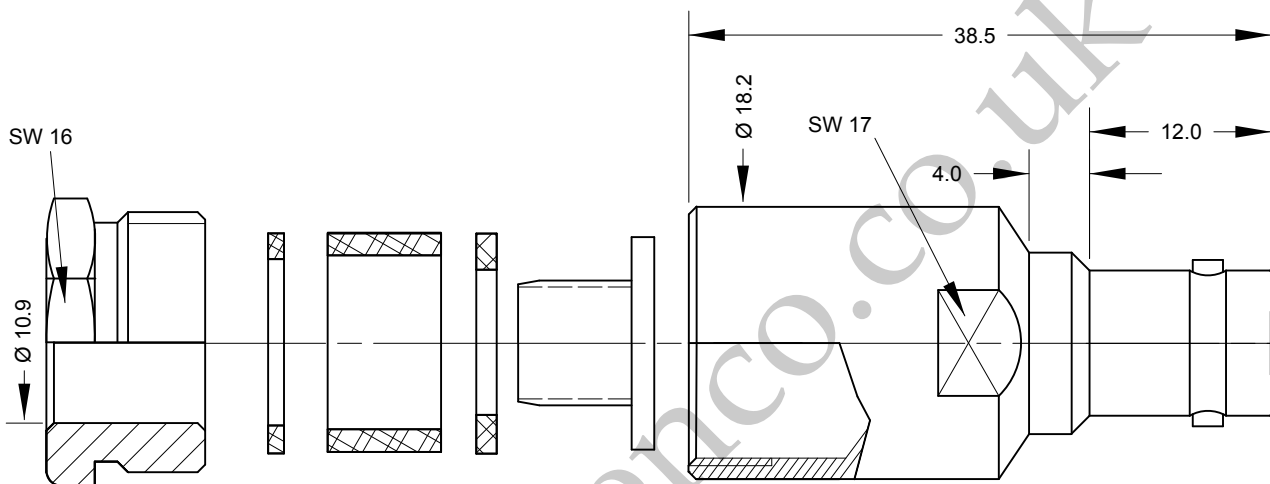


Cable types:- RG213, RG214 & Equivalents

Pin and insulator arrangement

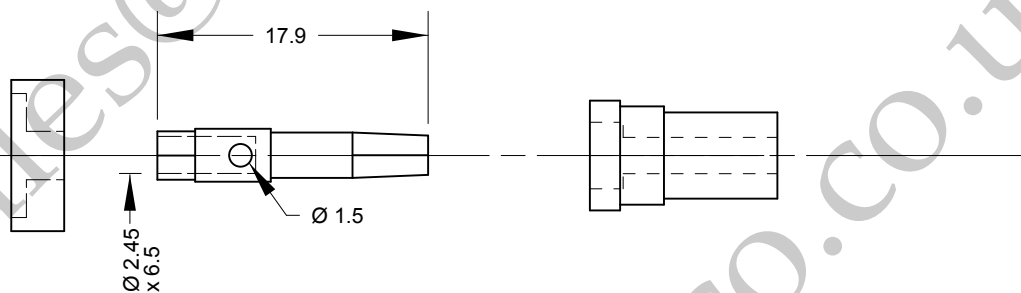

Cable Preparation

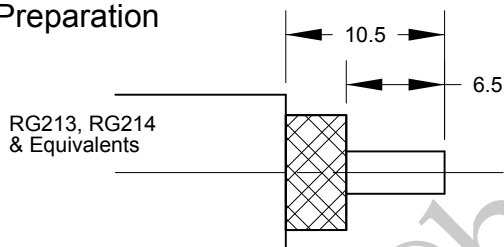

Cable Construction Specifications

	RG213	RG214
Inner Conductor	2.29mm	2.29mm
Dielectric	7.25mm	7.25mm
Outer Conductor	8.00mm	8.00mm
Overall Braid	8.30mm	8.60mm
Jacket	10.30mm	10.80mm

PART	DESCRIPTION
1 Body	Nickel
2 Dielectric	Teflon / PTFE
3 Contact Socket	Phosphor Bronze, Gold Plated
4 Nut	Nickel

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email: Sales@barencoco.uk Web: www.barencoco.uk

DRAWN Name BPG

Dimensions: mm

Date 20/04/2021

Last Rev.

SCALE 1 : 0.5

**BNC socket
clamp for RG213
& RG214**

SIZE
A4

DWG NUMBER
165105

REV -

SHEET 1 OF 1