


Cable types:-

RG213, RG214, LMR400 All jacket types
 ANT400 All jacket types & Equivalents

Remarks :- Centre contact soldering in 3.0mm slot

Cable preparation details

RG213, RG214, ANT400,
 LMR400 & Equivalents
 All jacket types

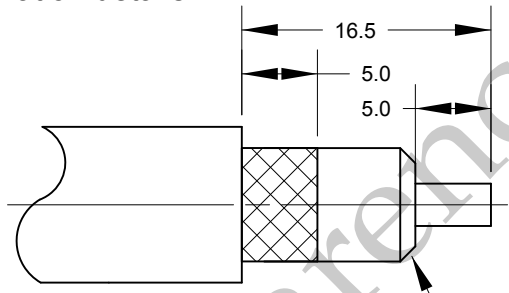

Chamfer foil edge to remove
 second screen if required on
 LMR400 & ANT400 Coax.

Cable Construction Specifications

	RG213	RG214	ANT400	LMR400	LMR400UF
Inner Conductor	2.29mm	2.29mm	2.74mm	2.74mm	2.74mm
Dielectric	7.25mm	7.25mm	7.24mm	7.24mm	7.24mm
Outer Conductor	8.00mm	8.00mm	7.39mm	7.39mm	7.39mm
Overall Braid	8.00mm	8.60mm	8.13mm	8.13mm	8.13mm
Jacket	10.30mm	10.80mm	10.30mm	10.29mm	10.29mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	PTFE / Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
 Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name	BPG	BNC elbow plug clamp for RG213, RG214, ANT400 & LMR400	
Dimensions: mm		SIZE	DWG NUMBER
Date	15/05/2020	A4	165160
Last Rev.		REV -	SHEET 1 OF 1
SCALE 1 : 0.5			