


Cable : RG213 & Equivalents

Pin arrangement

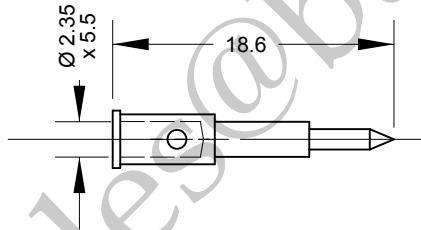


Note.
Supplied with heatshrink for crimp ferrule

Crimping Details

Crimp Pin Hex 0.100" (2.54mm)
 Crimp Ferrule Hex 0.429" (10.90mm)
 Crimp Tool Order Code:-
 180457

Cable Preparation

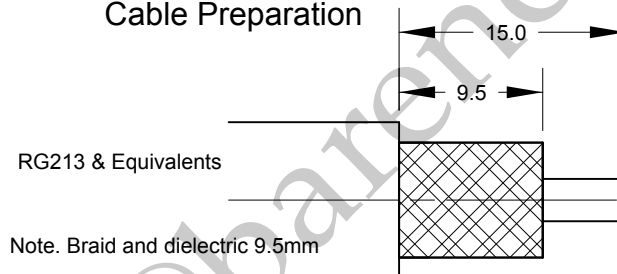

Cable Construction Specifications

RG213
 Inner Conductor 2.29mm
 Dielectric 7.25mm
 First Conductor 8.00mm
 Overall Braid 8.00mm
 Jacket 10.30mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
3	SHELL/BODY	BRASS	1	NICKEL
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	GOLD

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
 Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name BPG

Dimensions: mm

Date 14/05/2021

Last Rev.

SCALE 1 : 0.5

TNC plug crimp
 for RG213

SIZE
A4

DWG NUMBER
165315

REV -

SHEET 1 OF 1