



Cable : RG8Mini, ANT240, LMR240 & Equivalents

Pin arrangement

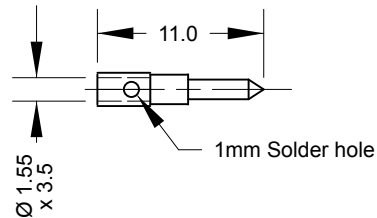

Cable Preparation

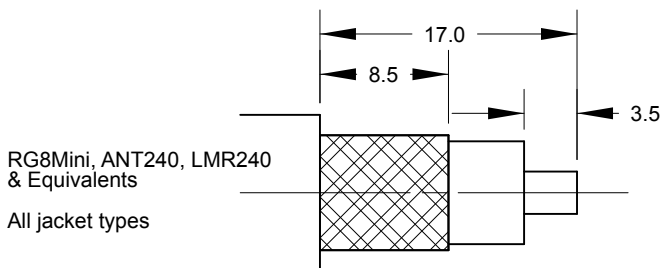

Note.
Supplied with heat shrink for crimp ferrule

Crimping Details

Crimp Ferrule Hex 0.255" (6.48mm)

Crimp Tool Order Code:-

180455 & 180456

Cable Construction Specifications

	LMR240	RG8Mini	ANT240
Inner Conductor	1.42mm	1.47mm	1.42mm
Dielectric	3.81mm	3.90mm	3.81mm
Outer Conductor	3.94mm	4.25mm	3.90mm
Overall Braid	4.52mm	4.25mm	4.52mm
Jacket	6.10mm	6.10mm	6.10mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	NICKEL
3	SHELL/BODY	BRASS	1	NICKEL
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name	BPG	TNC socket reverse pin crimp for RG8Mini ANT240 & LMR240	
Dimensions: mm		SIZE	DWG NUMBER
Date	15/05/2021	A4	165318
Last Rev.		REV -	SHEET 1 OF 1
SCALE 1 : 0.5			