


Cable : RG8Mini, ANT240, LMR240 & Equivalents

Pin arrangement



Note.  
Supplied with heat shrink for crimp ferrule


Crimping Details

Crimp Pin Hex 0.068" ( 1.72mm )  
Crimp Ferrule Hex 0.255" ( 6.48mm )

Crimp Tool Order Code:-

180455 & 180456

Cable Preparation

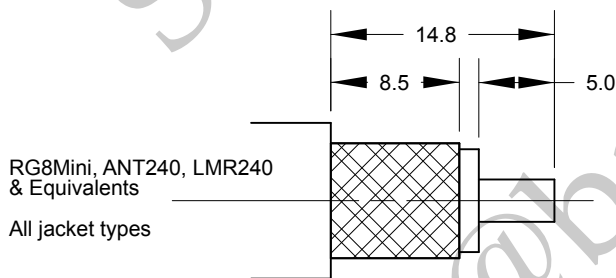

Cable Construction Specifications

	LMR240	RG8Mini	ANT240
Inner Conductor	1.42mm	1.47mm	1.42mm
Dielectric	3.81mm	3.90mm	3.81mm
Outer Conductor	3.94mm	4.25mm	3.90mm
Overall Braid	4.52mm	4.25mm	4.52mm
Jacket	6.10mm	6.10mm	6.10mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
3	SHELL/BODY	BRASS	1	NICKEL
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	GOLD

**BARENCO Ltd**

**Barenco Ltd**

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,  
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name	BPG	TNC plug reverse pin crimp for RG8Mini, ANT240 & LMR240	
Dimensions: mm		SIZE	DWG NUMBER
Date	15/05/2021	A4	165320
Last Rev.		REV -	SHEET 1 OF 1
SCALE 1 : 0.5			