


Cable : RG8Mini, ANT240, LMR240 & Equivalents

Pin arrangement



Note.

Supplied with heat shrink for crimp ferrule


Crimping Details

Crimp Pin Hex 0.068" (1.72mm)
 Crimp Ferrule Hex 0.255" (6.48mm)

Crimp Tool Order Code:-

180455 & 180456

Cable Preparation

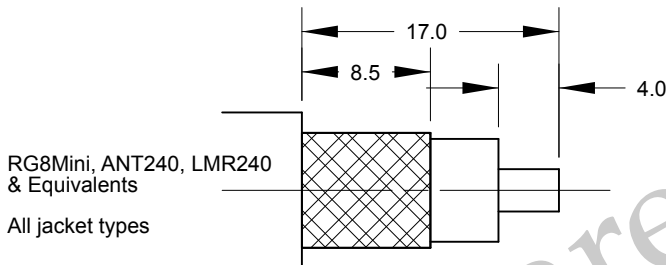

Cable Construction Specifications

| | LMR240 | RG8Mini | ANT240 |
|-----------------|--------|---------|--------|
| Inner Conductor | 1.42mm | 1.47mm | 1.42mm |
| Dielectric | 3.81mm | 3.90mm | 3.81mm |
| Outer Conductor | 3.94mm | 4.25mm | 3.90mm |
| Overall Braid | 4.52mm | 4.25mm | 4.52mm |
| Jacket | 6.10mm | 6.10mm | 6.10mm |

| CODE | DESCRIPTION | MATERIAL | QTY | FINISH |
|------|-------------|----------|-----|--------|
| 4 | FERRULE | BRASS | 1 | NICKEL |
| 3 | SHELL/BODY | BRASS | 1 | NICKEL |
| 2 | INSULATOR | TEFLON | 1 | |
| 1 | CONTACT PIN | BRASS | 1 | GOLD |

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
 Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

| | | | |
|----------------|------------|--|--------------|
| DRAWN Name | BPG | TNC socket reverse pin crimp for RG8Mini ANT240 & LMR240 | |
| Dimensions: mm | | SIZE | DWG NUMBER |
| Date | 15/05/2021 | A4 | 165323 |
| Last Rev. | | REV - | SHEET 1 OF 1 |
| SCALE 1 : 0.5 | | | |