



Cable : ANT400, LMR400 & Equivalents

Pin and insulator arrangement

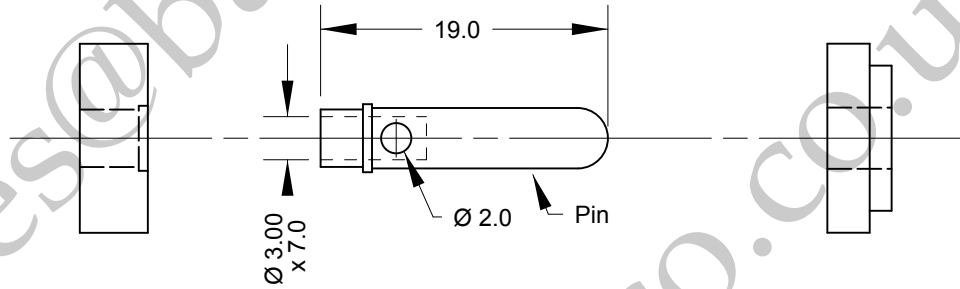

Cable Preparation

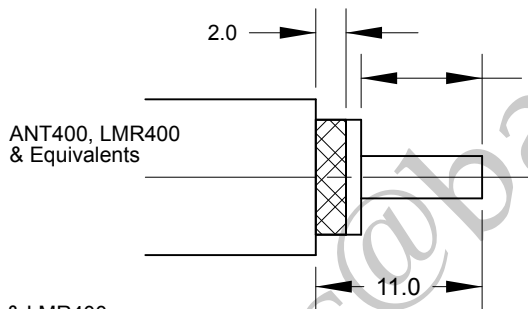

ANT400 & LMR400

Construction Specifications

Inner Conductor 2.74mm
 Dielectric 7.24mm
 Outer Conductor 7.39mm
 Overall Braid 8.13mm
 Jacket 10.29mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White or semi translucent

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
 Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
 Email.Sales@barenco.co.uk Web.www.barenco.co.uk

DRAWN Name BPG

Dimensions: mm

Date 20/07/2020

Last Rev. 07/04/2021

SCALE 1 : 0.5

UHF plug clamp for
 ANT400 & LMR400

SIZE
A4

DWG NUMBER
165430

REV -

SHEET 1 OF 1