



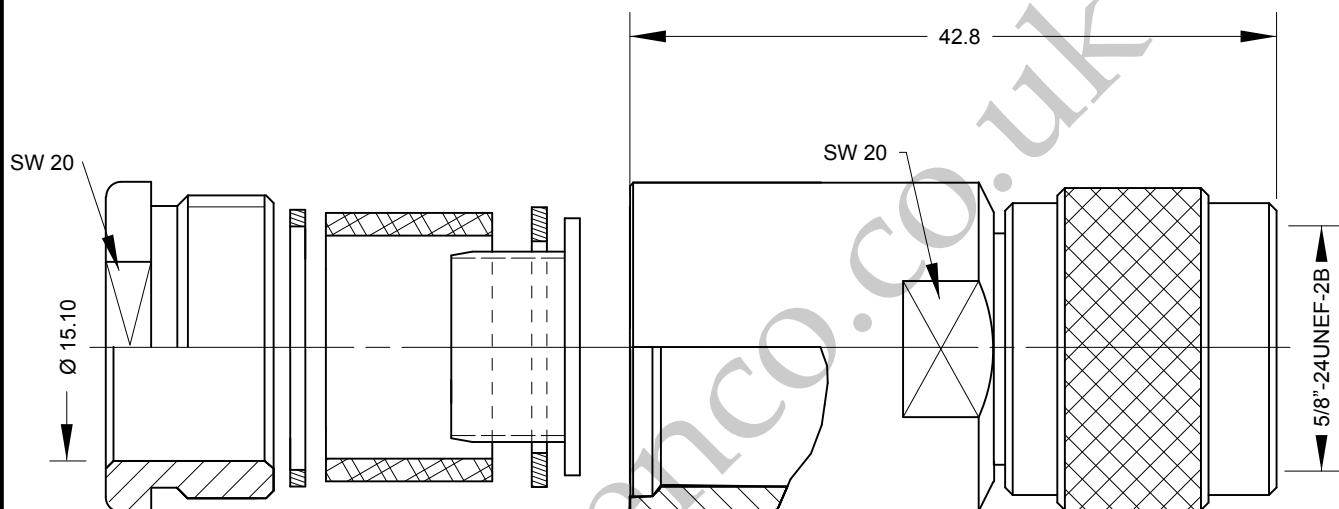


Cable : ANT600, LMR600 & Equivalents

#### Pin and insulator arrangement

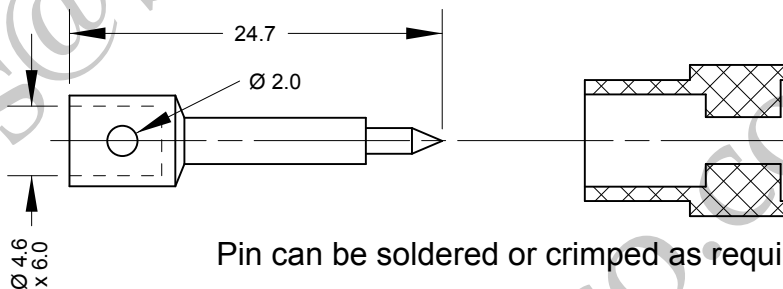

Pin can be soldered or crimped as required

#### Cable Preparation

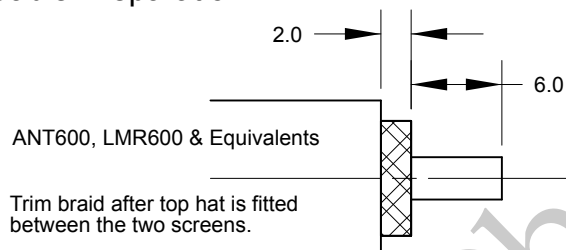

#### Crimping Details

Crimp Pin Hex 0.213" ( 5.41mm )

Crimp Tool Order Code:-

180455, 180456 & 180458

Cable: ANT600 & LMR600

#### Construction Specifications

Inner Conductor 4.47mm  
Dielectric 11.57mm  
Outer Conductor 11.71mm  
Overall Braid 12.45mm  
Jacket 14.99mm

|   | PART        | DESCRIPTION               |
|---|-------------|---------------------------|
| 1 | Shell/Body  | Brass, CuSnZn3 Plated     |
| 2 | Insulator   | Teflon                    |
| 3 | Pin Contact | Brass, Gold Plated        |
| 4 | Nut         | Brass, CuSnZn3 Plated     |
| 5 | Neoprene    | White or semi translucent |

## Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,  
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email: Sales@barenco.co.uk. Web: www.barenco.co.uk

## BARENCO Ltd

DRAWN Name BPG

Dimensions: mm

Date 16/11/2019

Last Rev.

SCALE 1 : 0.5

N plug straight  
clamp for ANT600  
& LMR600

SIZE

A4

DWG NUMBER

168000

REV -

SHEET 1 OF 1