


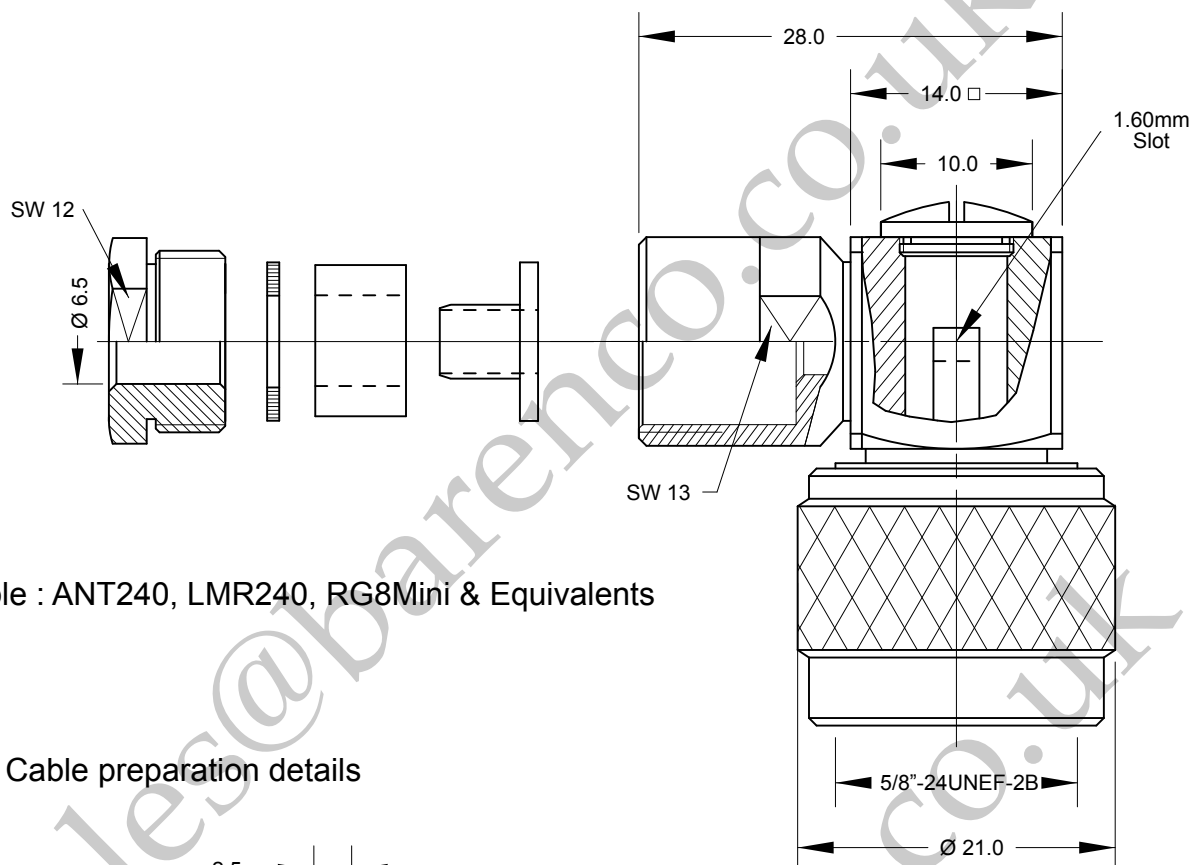

Cable : ANT240, LMR240, RG8Mini & Equivalents

Cable preparation details

ANT240, LMR240, RG8Mini
& Equivalents
All jacket types

Chamfer foil edge to
remove second screen
if required on coax.

Remarks:-
Centre contact soldering in 1.60mm
slot under screw cover.

Cable Construction Specifications

	LMR240	RG8Mini	ANT240
Inner Conductor	1.42mm	1.47mm	1.42mm
Dielectric	3.81mm	3.90mm	3.81mm
Outer Conductor	3.94mm	4.25mm	3.90mm
Overall Braid	4.52mm	4.25mm	4.52mm
Jacket	6.10mm	6.10mm	6.10mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	PTFE / Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name BPG

Dimensions: mm

Date 3/08/2018

Last Rev.

SCALE 1 : 0.5

N elbow plug for
ANT240, LMR240
& RG8Mini

SIZE

A4

DWG NUMBER

168044

REV -

SHEET 1 OF 1