


Cable : ANT240, LMR240, RG8Mini & Equivalents

Cable preparation details

Pin & Insulator arrangement

ANT240, LMR240,
RG8Mini
& Equivalents
All jacket types

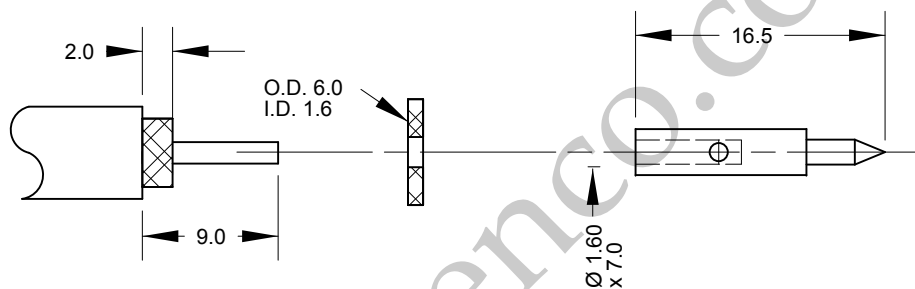

Note.

Solder centre contact
or
Centre conductor crimp Hex: 0.1" (2.54mm)

Cable Construction Specifications all jackets

	LMR240	RG8Mini	ANT240
Inner Conductor	1.42mm	1.47mm	1.42mm
Dielectric	3.81mm	3.90mm	3.81mm
Outer Conductor	3.94mm	4.25mm	3.90mm
Overall Braid	4.52mm	4.25mm	4.52mm
Jacket	6.10mm	6.10mm	6.10mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	PTFE / Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name BPG

Dimensions: mm

Date 07/07/2020

Last Rev.

SCALE 1 : 0.5

N plug clamp for
ANT240, LMR240
RG8Mini

SIZE

A4

DWG NUMBER

168048

REV -

SHEET 1 OF 1