



SW=16

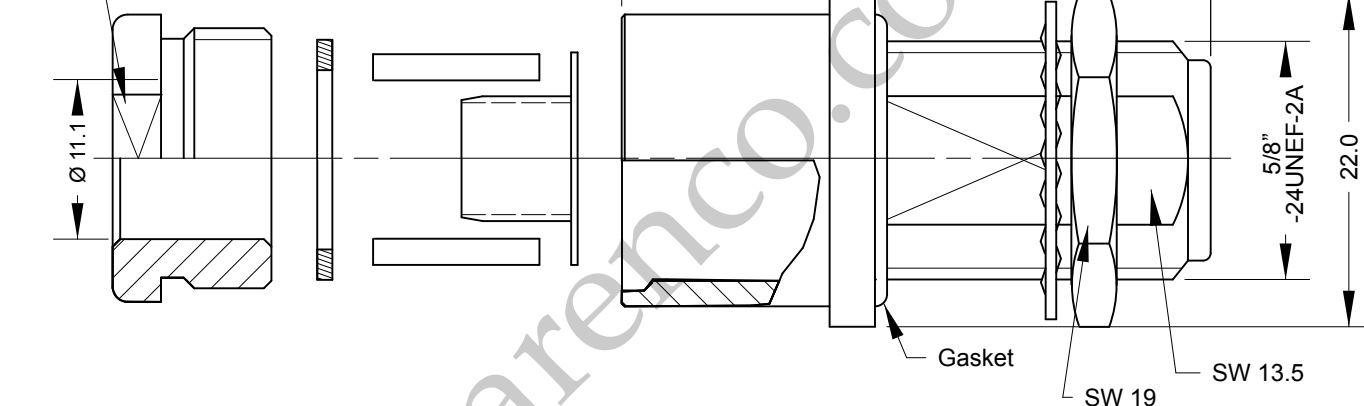


Cable : ANT400, LMR400 & Equivalents


Pin and insulator arrangement

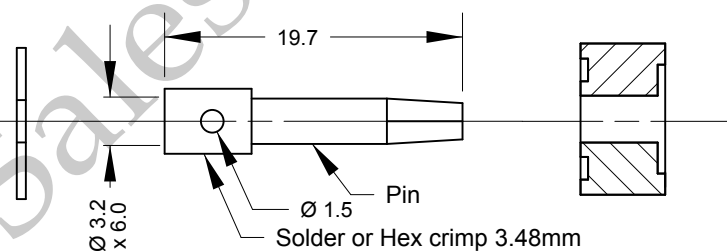

Recommended Panel Piercings Dimensions

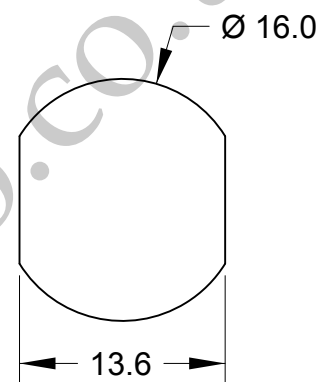

Cable Preparation

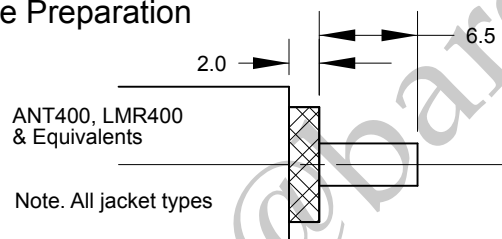

Crimping Details

Crimp Pin Hex 0.137" (3.48mm)

Crimp Tool Order Code:- 180456

Cable Construction Specifications

	LMR400	LMR400UF	ANT400
Inner Conductor	2.74mm	2.74mm	2.74mm
Dielectric	7.24mm	7.24mm	7.24mm
Outer Conductor	7.39mm	7.39mm	7.39mm
Overall Braid	8.13mm	8.13mm	8.13mm
Jacket	10.29mm	10.29mm.	10.30mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Gasket	Silicone Rubber

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name BPG

Dimensions: mm

Date 14/11/2019

Last Rev.

SCALE 1 : 0.5

**N Socket bulkhead
for ANT400 &
LMR400**

SIZE
A4

DWG NUMBER
168080

REV -

SHEET 1 OF 1