


Cable : ANT600, LMR600 & Equivalents

Pin and insulator arrangement

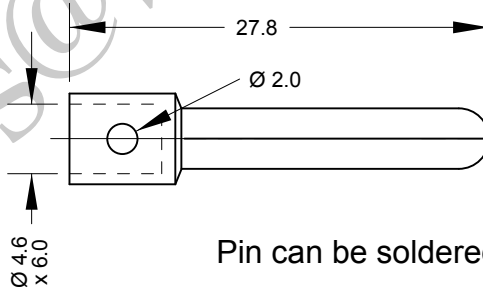


Pin can be soldered or crimped as required

Cable Preparation

ANT600, LMR600 & Equivalents

All jacket types

Trim braid after top hat is fitted between the two screens.

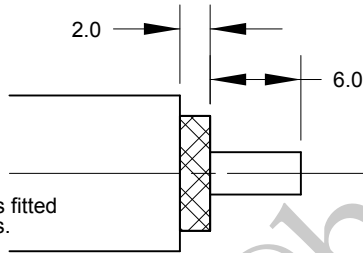

Crimping Details

Crimp Pin Hex 0.213" (5.41mm)

Crimp Tool Order Code:-

180455, 180456 & 180458

Cable: ANT600 & LMR600

Construction Specifications

Inner Conductor 4.47mm
 Dielectric 11.57mm
 Outer Conductor 11.71mm
 Overall Braid 12.45mm
 Jacket 14.99mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White or semi translucent

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford, Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name BPG

Dimensions: mm

Date 28/05/2021

Last Rev.

SCALE 1 : 0.5

UHF plug straight clamp for ANT600 & LMR600

SIZE

A4

DWG NUMBER

168200

REV -

SHEET 1 OF 1