



Cable : ANT400, LMR400, Ecoflex 10 & Equivalents

Pin and insulator arrangement

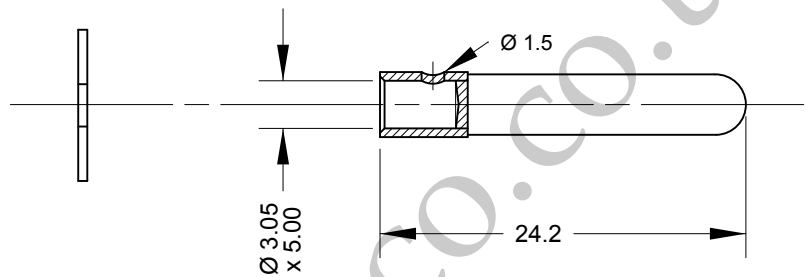

Cable Preparation

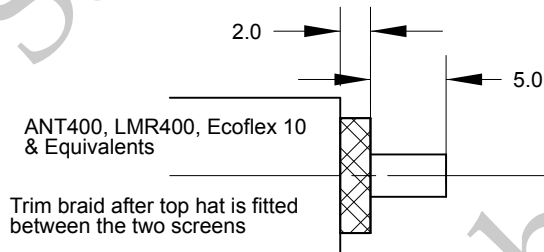

Note. All jacket types

Note.

Solder centre contact
or
Crimp Pin Hex 0.137" (3.48mm)

Crimp Tool Order Code:- 180456

Cable Construction Specifications

	LMR400	LMR400UF	ANT400	Ecoflex 10
Inner Conductor	2.74mm	2.74mm	2.74mm	2.85mm
Dielectric	7.24mm	7.24mm	7.24mm	7.25mm
Outer Conductor	7.39mm	7.39mm	7.39mm	N/A
Overall Braid	8.13mm	8.13mm	8.13mm	N/A
Jacket	10.29mm	10.29mm	10.30mm	10.20mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name	BPG	UHF plug clamp for ANT400, LMR400 Ecoflex 10	
Dimensions: mm		SIZE	DWG NUMBER
Date	3/02/2020	A4	168210
Last Rev.	30/08/2020	REV -	SHEET 1 OF 1
SCALE 1 : 0.5			