


Cable : Aircell 7, ANT300, LMR300 & Equivalents

Cable preparation details

Pin & Insulator arrangement

Aircell 7, ANT300, LMR300 & Equivalents
All jacket types

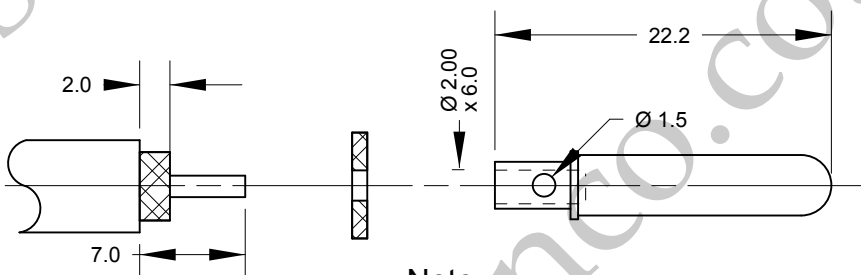

Note.

Solder centre contact
or

Centre conductor crimp Hex: 0.1" (2.54mm)

Crimp Tool Order Code:-

180454, 180456 & 180457

Cable Construction Specifications

	LMR300	Aircell 7	ANT300
Inner Conductor	1.78mm	1.85mm	1.78mm
Dielectric	4.83mm	N/A	4.83mm
Overall Braid	5.72mm	N/A	5.72mm
Jacket	7.62mm	7.30mm	7.60mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	PTFE / Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name	BPG	UHF plug clamp for Aircell 7, ANT300 & LMR300	
Dimensions: mm		SIZE	DWG NUMBER
Date	03/03/2020	A4	168240
Last Rev.		REV -	SHEET 1 OF 1
SCALE 1 : 0.5			