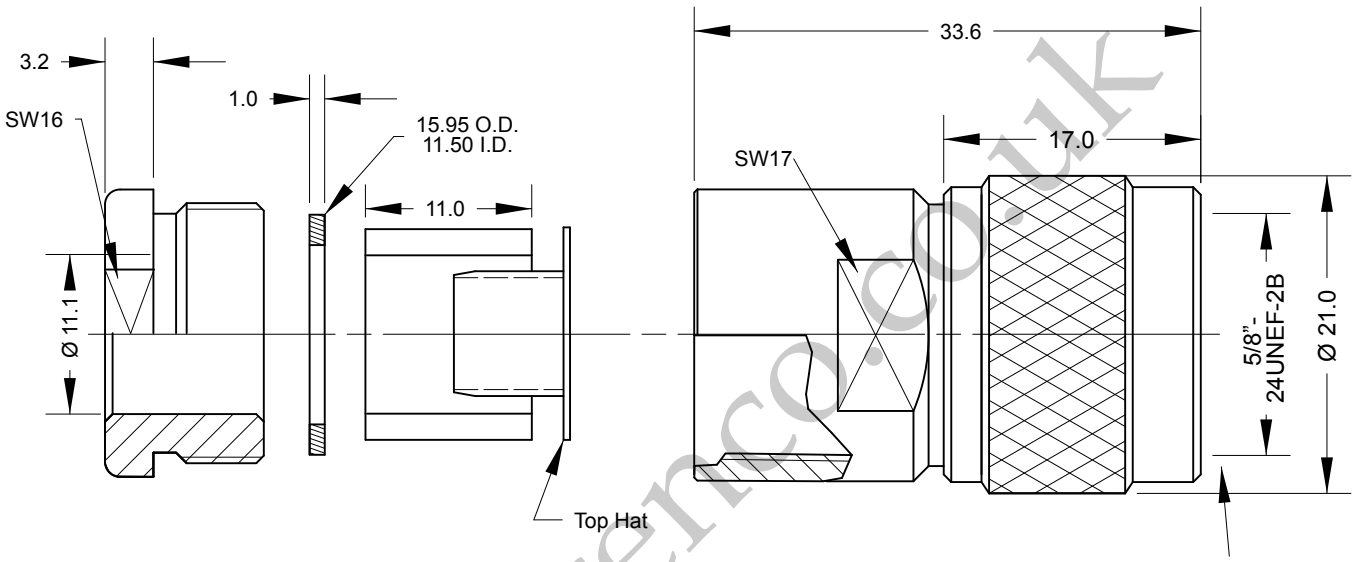

Cable : RG213, RG214 & Equivalents

Pin and insulator arrangement

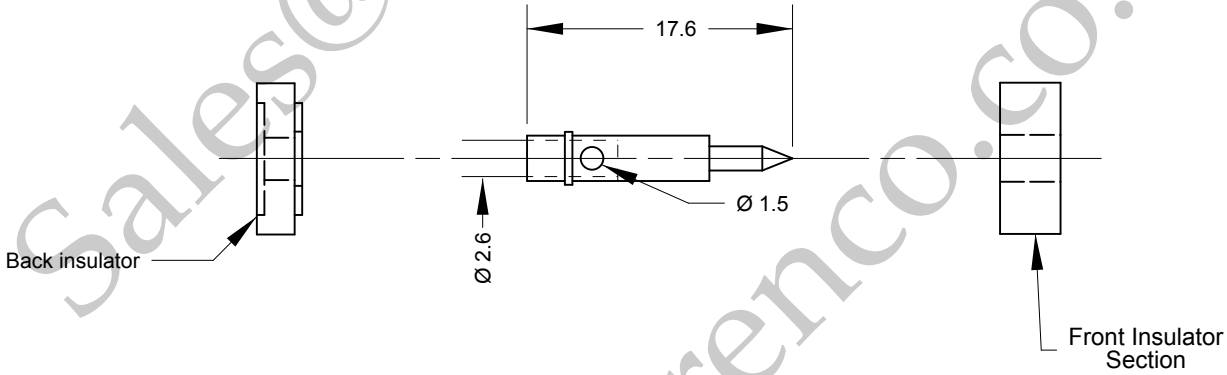

Cable Preparation

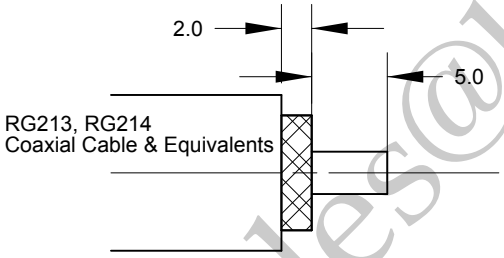

Cable Construction Specifications

	RG213	RG214
Inner Conductor	2.29mm	2.29mm
Dielectric	7.25mm	7.25mm
Outer Conductor	8.00mm	8.00mm
Overall Braid	8.00mm	8.60mm
Jacket	10.30mm	10.80mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	PTFE / Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

Barenco Ltd
Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name B. Gell

Dimensions: mm

Date 5/02/2020

Last Rev.

N plug clamp for RG213 & RG214

SIZE A4 | DWG NUMBER 165000

SCALE 1 : 0.5 | REV - | SHEET 1 OF 1

Sales@barenco.co.uk
Sales@barenco.co.uk