


Cable types:-

- RG213
- RG214
- LMR400 All jacket types
- ANT400 All jacket types & Equivalents

Remark :- Centre contact soldering in 2.85mm slot

Cable preparation details

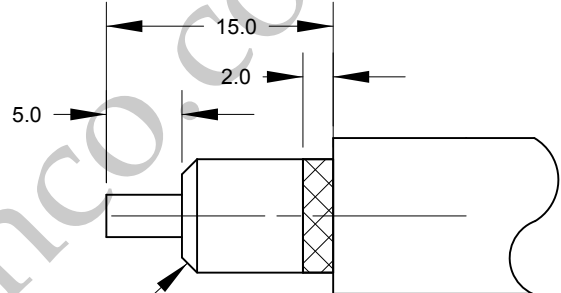

Cable Construction Specifications

	RG213	RG214
Inner Conductor	2.29mm	2.29mm
Dielectric	7.25mm	7.25mm
Outer Conductor	8.00mm	8.00mm
Overall Braid	8.00mm	8.60mm
Jacket	10.30mm	10.80mm

Cable: Times Microwave LMR400

Construction Specifications

Inner Conductor	2.74mm
Dielectric	7.24mm
Outer Conductor	7.39mm
Overall Braid	8.13mm
Jacket	10.29mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	PTFE / Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

## Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford, Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

## BARENCO Ltd

DRAWN Name	B. Gell	N Elbow plug clamp for LMR-400	
Dimensions: mm			
Date	23/02/2020	SIZE	DWG NUMBER
Last Rev.		A4	165073
SCALE	1 : 0.5	REV	-
			SHEET 1 OF 1