


Cable : LMR240, LMR240UF, RG8Mini & Equivalentents

Cable preparation details

Pin & Insulator arrangement

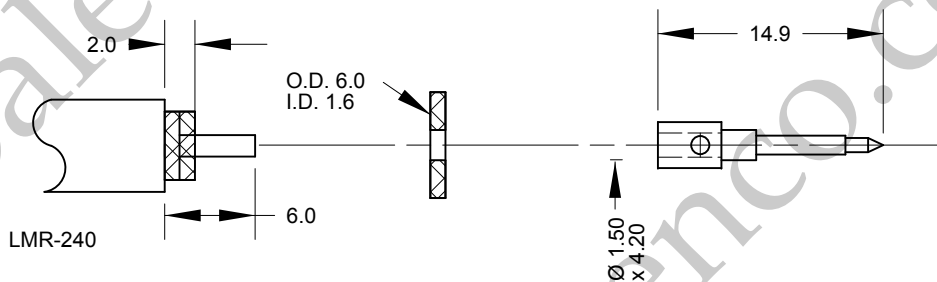

Note.

Solder centre contact

or

Centre conductor crimp Hex: 0.1" (2.54mm)

Cable Construction Specifications

	LMR240UF & LMR240	RG8Mini
Inner Conductor	1.42mm	1.47mm
Dielectric	3.81mm	3.90mm
Outer Conductor	3.94mm	4.25mm
Overall Braid	4.52mm	4.25mm
Jacket	6.10mm	6.10mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn3 Plated
2	Insulator	PTFE / Teflon
3	Pin Contact	Brass, Gold Plated
4	Nut	Brass, CuSnZn3 Plated
5	Neoprene	White

BARENCO Ltd

DRAWN Name	B. Gell	SMA plug clamp for LMR-240	
Dimensions: mm			
Date	07/07/2020	SIZE	DWG NUMBER
Last Rev.		A4	168330
SCALE	1 : 0.5	REV	-
			SHEET 1 OF 1

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk