



Cable : LMR400, Ecoflex-10 & Equivalents

Pin and insulator arrangement

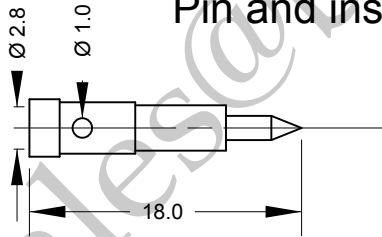

Cable Preparation Details

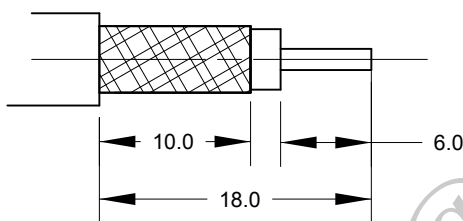

Cable : LMR-400

Crimp Hex : 0.429" (10.9mm)

Remark : Centre core soldering or crimp.

Crimp Hex : 0.128" (3.25mm)

Cable: Times Microwave LMR-400

Construction Specifications

Inner Conductor 2.74mm

Dielectric 7.24mm

Outer Conductor 7.39mm

Overall Braid 8.13mm

Jacket 10.29mm

4	CRIMP FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	GOLD
CODE	DESCRIPTION	MATERIAL	QTY	FINISH

BARENCO Ltd

DRAWN Name B. Gell

Dimensions: mm

Date 24/10/2018

Last Rev. 22/01/2019

SCALE 1 : 1

N plug crimp
for LMR400

SIZE
A4

DWG NUMBER
170009

REV -

SHEET 1 OF 1

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk