


Cable : RG58, RG141 & Equivalents


Pin, solder / crimp with positive lock

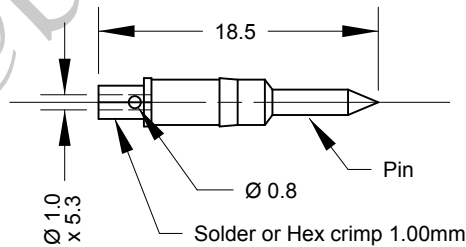

Note. Pin will snap into barrel with a positive lock.

Cable Preparation

RG58, RG141 & Equivalents

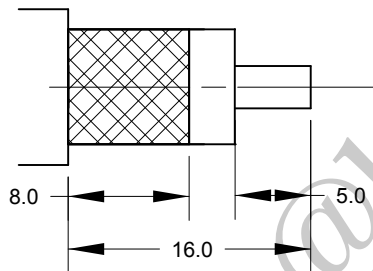

Cable Construction Specifications

	RG58.	RG141
Inner Conductor	0.91mm	0.94mm
Dielectric	2.95mm.	2.95mm
Overall Braid	3.30mm	3.30mm
Jacket	4.95mm	4.80mm

Note.

Supplied with heat shrink for crimp ferrule

Crimping Details

Crimp Pin Hex	0.068" (1.00mm)
Crimp Ferrule Hex	0.213" (5.40mm)

Crimp Tool Order Code:-

180455, 180456 or 180458

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Ferrule	Brass, Nickel Plated

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford, Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name B. Gell

Dimensions: mm

Date 10/07/2020

Last Rev.

SCALE 1 : 0.5

N plug crimp for
RG58 & RG141

SIZE
A4

DWG NUMBER
170010

REV -

SHEET 1 OF 1