



Cable : LMR240, LMR240UF, ANT240 & Equivalents

Pin and insulator arrangement

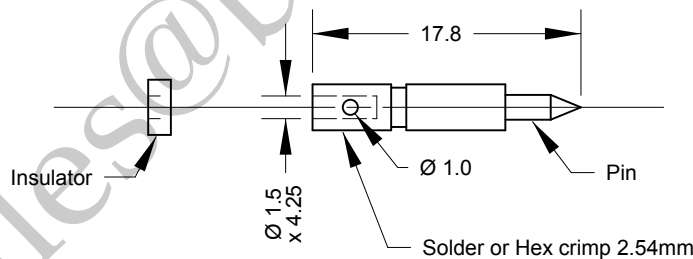

Cable Preparation

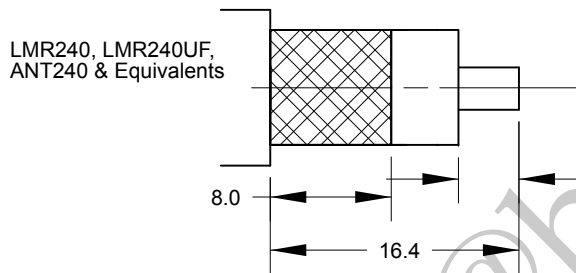

Note.

Supplied with heat shrink for crimp ferrule

Crimping Details

Crimp Pin Hex 0.100" (2.54mm)
 Crimp Ferrule Hex 0.255" (6.48mm)

Crimp Tool Order Code:-

180456

General Cable Types: 4D-FB/H155/LMR240

Cable Construction Specifications

	LMR240	LMR240UF	ANT240
Inner Conductor	1.42mm	1.42mm	1.42mm
Dielectric	3.81mm	3.81mm	3.81mm
Outer Conductor	3.94mm	3.94mm	3.94mm
Overall Braid	4.52mm	4.52mm	4.52mm
Jacket	6.10mm	6.10mm	6.10mm

	PART	DESCRIPTION
1	Shell/Body	Brass, CuSnZn Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Ferrule	Brass, Nickel Plated

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
 Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name B. Gell

Dimensions: mm

Date 10/07/2020

Last Rev.

SCALE 1 : 0.5

N plug crimp
 for LMR240

SIZE
A4

DWG NUMBER
170011

REV -

SHEET 1 OF 1