



Cable : RG214 & Equivalents

Pin, solder / crimp with positive lock

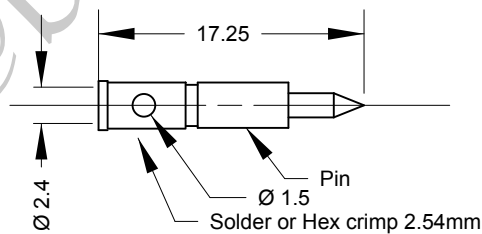

Note. Pin will snap into barrel with a positive lock.

Cable Preparation

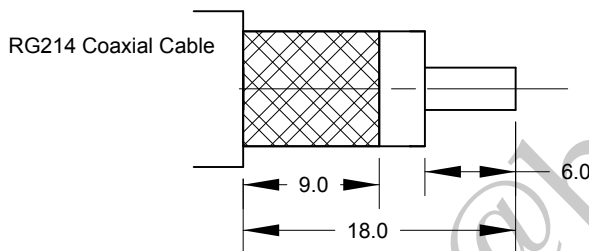

Cable Construction Specifications

Inner Conductor RG213
 2.29mm
 Dielectric 7.25mm
 Outer Conductor 8.00mm
 Overall Braid 8.60mm
 Jacket 10.80mm

Note.

Supplied with heat shrink for crimp ferrule

Crimping Details

Crimp Pin Hex 0.100" (2.54mm)
 Crimp Ferrule Hex 0.429" (10.9mm)

Crimp Tool Order Code:-

180454 or 180457

	PART	DESCRIPTION
1	Shell/Body	Brass, Nickel Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Ferrule	Brass, Nickel Plated

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
 Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name B. Gell

Dimensions: mm

Date 10/07/2020

Last Rev.

SCALE 1 : 0.5

N plug crimp
 for RG214

SIZE
A4

DWG NUMBER
170012L

REV -

SHEET 1 OF 1