



**Cable: RG213 & Equivalents**

**Pin Arrangement**

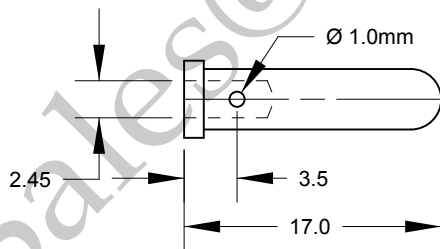

**Cable Preparation**

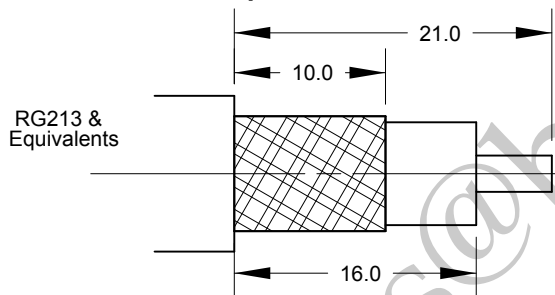

Note.  
Supplied with heatshrink for crimp ferrule

**Crimping Details**

Crimp Ferrule Hex : 0.429" ( 10.90mm )

Crimp Pin Hex : 0.128" ( 3.25mm )

Crimp Tool Order Code : 180457

**Cable Construction Specifications**

	RG213	RG214
Inner Conductor	2.29mm	2.29mm
Dielectric	7.25mm	7.25mm
Outer Conductor	8.00mm	8.00mm
Overall Braid	8.00mm	8.60mm
Jacket	10.30mm	10.80mm

Note. If RG214 is used ferrule will have to be changed

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	NICKEL
3	SHELL/BODY	BRASS	1	NICKEL
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	SILVER

**Barenco Ltd**

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,  
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

**BARENCO Ltd**

<b>DRAWN</b> Name	B. Gell	<b>UHF plug crimp for RG213 &amp; 214</b>	
Dimensions: mm		<b>SIZE</b> A4	<b>DWG NUMBER</b> 170108
Date	20/04/2020	<b>REV</b> -	<b>SHEET</b> 1 OF 1
Last Rev.			
<b>SCALE</b> 1 : 0.5			