



Cable : RG174, RG188, RG316 & Equivalents

Pin arrangement



Cable Preparation

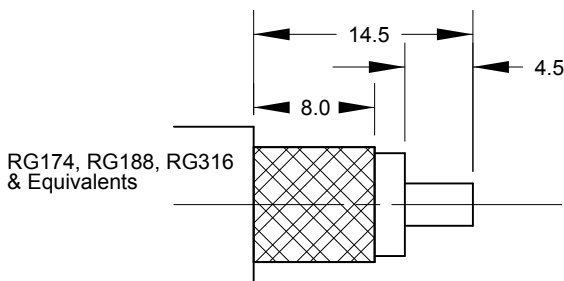

Note.
Supplied with heat shrink for crimp ferrule

Crimping Details

Centre contact solder only
Crimp Ferrule Hex 0.213" (5.4mm)

Crimp Tool Order Code:-

180455, 180456 or 180458

Cable Construction Specifications

	RG174	RG188	RG316
Inner Conductor	0.48mm	0.51mm	0.53mm
Dielectric	1.52mm	1.52mm	1.53mm
Overall Braid	1.98mm	2.06mm	1.98mm
Jacket	2.54mm	2.79mm	2.50mm

4	FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD
CODE	DESCRIPTION	MATERIAL	QTY	FINISH

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name	BPG	TNC socket crimp for RG174, RG188 & RG316	
Dimensions: mm			
Date	31/12/2020	SIZE	DWG NUMBER
Last Rev.		A4	168410S
SCALE 1 : 0.5	REV -	SHEET 1 OF 1	