


Cable : RG214 & Equivalents

Pin arrangement

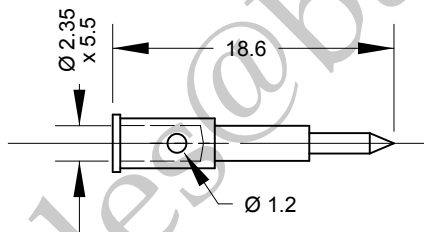

Note.
Supplied with heatshrink for crimp ferrule

Crimping Details


Crimp Pin Hex 0.100" (2.54mm)

Crimp Ferrule Hex 0.429" (10.90mm)

Crimp Tool Order Code:-

180457

Cable Preparation

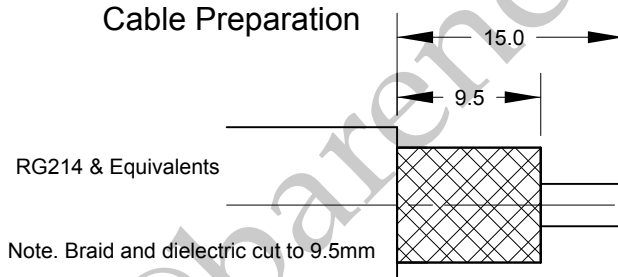

Cable Construction Specifications

	RG214
Inner Conductor	2.29mm
Dielectric	7.25mm
First Conductor	7.80mm
Overall Braid	8.30mm
Jacket	10.80mm

3	SHELL/BODY	BRASS	1	NICKEL
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	GOLD
CODE	DESCRIPTION	MATERIAL	QTY	FINISH

BARENCO Ltd

DRAWN Name BPG

Dimensions: mm

Date 14/05/2021

Last Rev.

SCALE 1 : 0.5

TNC plug crimp
for RG214

SIZE
A4

DWG NUMBER
165315L

REV -

SHEET 1 OF 1

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk