



Cable : RG174, RG188, RG316 & Equivalents

Pin arrangement



Cable Preparation

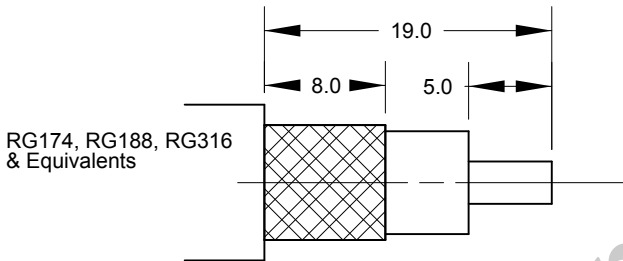

Note.
Supplied with heat shrink for crimp ferrule

Crimping Details

Centre contact solder only
Crimp Ferrule Hex 0.213" (5.40mm)

Crimp Tool Order Code:-

180455, 180456 or 180458

Cable Construction Specifications

	RG174	RG188	RG316
Inner Conductor	0.48mm	0.51mm	0.53mm
Dielectric	1.52mm	1.52mm	1.53mm
Overall Braid	1.98mm	2.06mm	1.98mm
Jacket	2.54mm	2.79mm	2.50mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name	BPG	TNC plug crimp for RG174, RG188 & RG316		
Dimensions: mm				
Date	28/05/2021	SIZE	DWG NUMBER	
Last Rev.		A4	168400S	
SCALE	1 : 0.5	REV	-	SHEET 1 OF 1