



Cable : RG142, RG223, RG400 & Equivalents

Pin arrangement

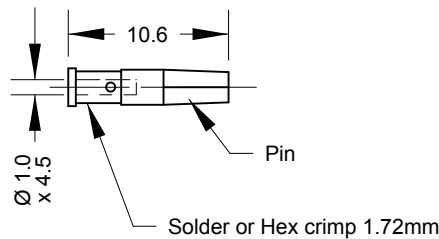

Cable Preparation

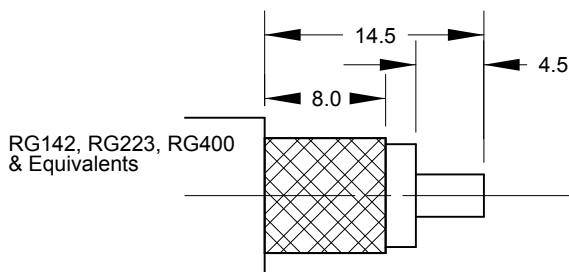

Note.
Supplied with heat shrink for crimp ferrule

Crimping Details

Crimp Pin Hex 0.068" (1.72mm)
Crimp Ferrule Hex 0.213" (5.40mm)

Crimp Tool Order Code:-

180455, 180456 or 180458

Cable Construction Specifications

	RG142	RG223	RG400
Inner Conductor	0.95mm	0.89mm	0.97mm
Dielectric	2.95mm	2.95mm	2.95mm
Overall Braid	3.96mm	4.00mm	3.96mm
Jacket	5.00mm	5.40mm	4.95mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name	BPG	TNC socket crimp for RG142, RG223 & RG400		
Dimensions: mm				
Date	09/07/2020	SIZE	DWG NUMBER	
Last Rev.		A4	168410B	
SCALE	1 : 0.5	REV	-	SHEET 1 OF 1