



Cable : RG178, RG196 & Equivalents

Pin arrangement



Cable Preparation

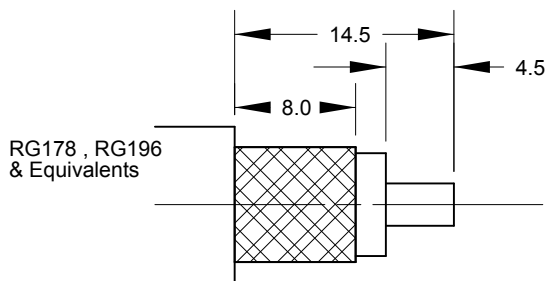

Note.  
Supplied with heat shrink for crimp ferrule

Crimping Details

Centre contact solder only  
Crimp Ferrule Hex 0.213" ( 5.4mm )

Crimp Tool Order Code:-

180455, 180456 or 180458

Cable Construction Specifications

	RG178	RG196
Inner Conductor	0.30mm	0.28mm
Dielectric	0.86mm	0.89mm
Overall Braid	1.30mm	1.37mm
Jacket	1.80mm	2.00mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD

**BARENCO Ltd**

<b>DRAWN Name</b>	BPG	<b>TNC socket crimp for RG178 &amp; RG196</b>	
<b>Dimensions:</b>	mm		
<b>Date</b>	31/12/2020	<b>SIZE</b>	<b>DWG NUMBER</b>
<b>Last Rev.</b>		<b>A4</b>	<b>168410T</b>
<b>SCALE</b>	1 : 0.5	<b>REV</b>	-
		<b>SHEET</b>	1 OF 1

**Barenco Ltd**

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford, Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk