


Cable : RG178, RG196 & Equivalents

Cable Preparation

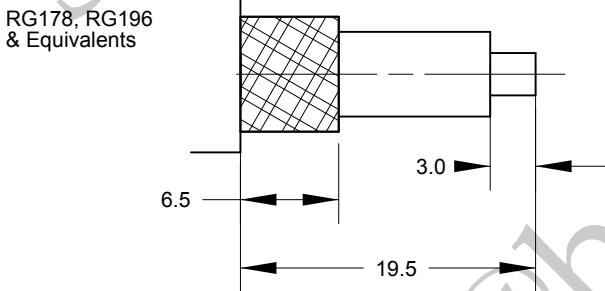

Note.
 Supplied with heat shrink for crimp ferrule
 Crimping Details :-
 Crimp Ferrule Hex 0.213" (5.41mm)
 Crimp Tool Order Code:-
 180455, 180456 or 180458

Cable Construction Specifications

	RG178	RG196
Inner Conductor	0.30mm	0.28mm
Dielectric	0.86mm	0.89mm
Overall Braid	1.30mm	1.37mm
Jacket	1.80mm	2.00mm

	PART	DESCRIPTION
1	Shell/Body	Brass, Nickel Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Ferrule	Brass, Nickel Plated

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
 Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name B. Gell

Dimensions: mm

Date 10/07/2020

Last Rev.

SCALE 1 : 0.5

N elbow plug
 crimp for
 RG178 & RG196

SIZE
A4

DWG NUMBER
170013T

REV -

SHEET 1 OF 1